


MBRD1040CT-MBRD10200CT

Features:

- ☐ Low power loss,high efficiency.
High surge capacity
- ☐ For use in low voltage,high frequency inverters,
free wheeling,and polarity protection applications.
- ☐ Metal silicon junction,majority carrier conduction.
- ☐ High current Capability,low forward voltage drop.
- ☐ Guard ring for over voltage protection.

TO-252



1.Anode 2.Cathode 3. Anode

Absolute Maximum Ratings (Ta=25°C unless otherwise noted)

Parameter		Symbol	MBRD 1040 CT	MBRD 1045 CT	MBRD 1050 CT	MBRD 1060 CT	MBRD 1080 CT	MBRD 1090 CT	MBRD 10100 CT	MBRD 10150 CT	MBRD 10200 CT	Unit
Maximum Recurrent Peak Reverse Voltage		V _{RRM}	40	45	50	60	80	90	100	150	200	V
Maximum RMS Voltage		V _{RMS}	28	31.5	35	42	56	63	70	105	140	
Maximum DC Blocking Voltage		V _{R(DC)}	40	45	50	60	80	90	100	150	200	
Maximum Average Forward Current		I _{F(AV)}	10									A
Peak Forward Surge Current:8.3ms single half sine-wave superimposed on rated load (JEDEC method)		I _{FSM}	150									
Maximum Forward Voltage at 5A per leg		V _F	0.65		0.72		0.85			0.92		V
Maximum DC Reverse Current at Rated DC Blocking Voltage	Tj=25℃	I _R	0.1									mA
	Tj=125℃		20									
Maximum Operating Junction Temperature		T _j	150				175				℃	
Storage Temperature		T _{stg}	-55~+150				-65~+175					
Typical Thermal Resistance		R _{θJC}	1.4									℃/W

Typical Characteristics

RATING AND CHARACTERISTIC CURVES

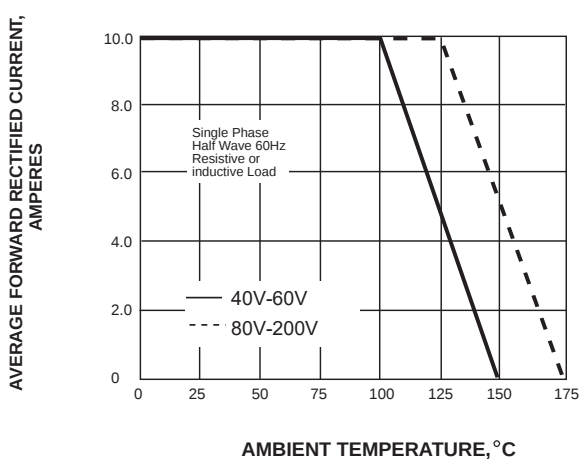


Fig.1 FORWARD CURRENT ERATING CURVE

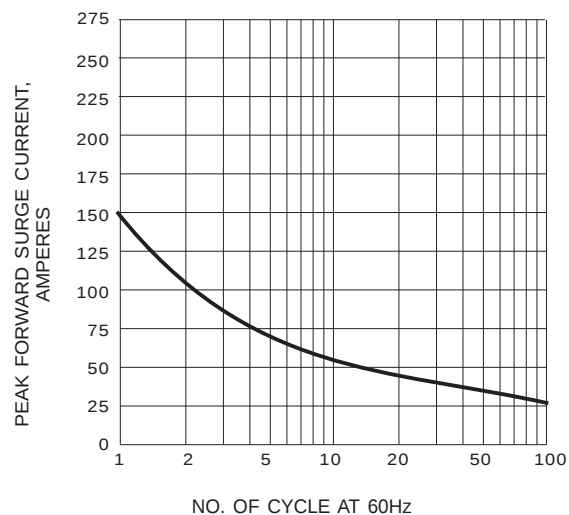


Fig.2 MAXIMUM NON-REPETITIVE SURGE CURRENT

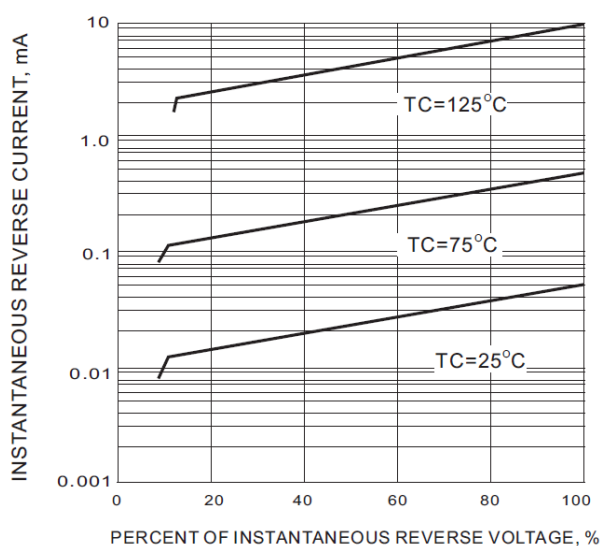


Fig.3 TYPICAL REVERSE CHARACTERISTIC


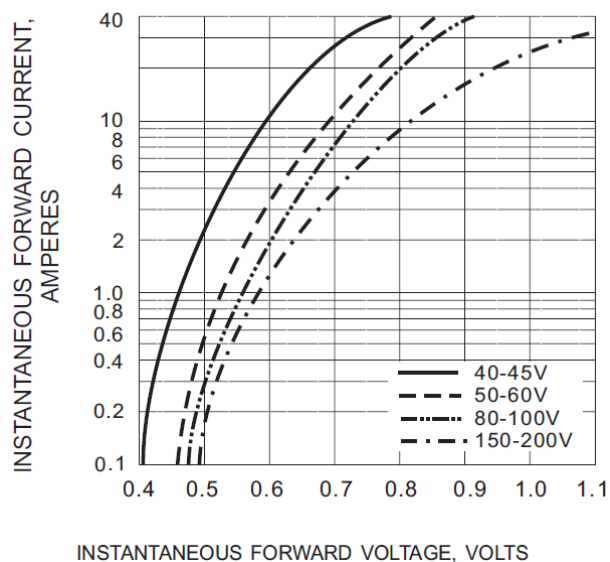



Fig.4 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

Package Dimension

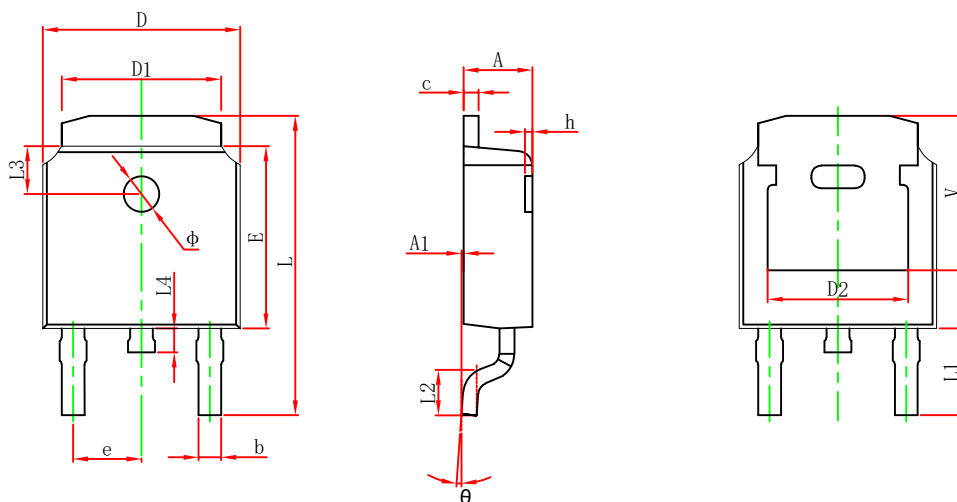

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.700	0.860	0.025	0.030
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.300	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.712	10.312	0.382	0.406
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.250 REF.		0.207 REF.	

TO-252-2L Suggest Pad Layout

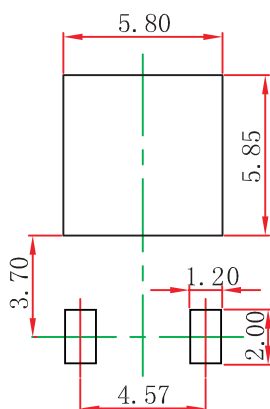

NOTE:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.